

Datasheet part no. 71093



Flush-mounting socket P30 IP44 – reduced flange


- Protection Type: IP44 when not plugged in.
- Protection Type: IP20 when plugged in.
- Rated Current: 16A
- Poles: 2P+E
- Frequency: 50/60Hz
- Voltage: 200-250V~
- Socket: Italian/German Standard
- The cover has a spring closure
- The seal works as a drilling mask
- Contacts: brass. shielded
- Color: grey RAL7035, blue
- Mark: MADE IN ITALY
- IK: 08
- Material: self-extinguishing, resistant to fire and shock.
- Packaging: Bag into one carton containing 20 pieces
- Net Weight: 49g

FANTON S.p.A.

Società soggetta a direzione e coordinamento da parte di Fa.Mi. srl

Viale dell'Industria, 8/10
35026 CONSELVE (PD) ITALY
Web: <http://www.fanton.com>
info@fanton.com

P.I./VAT - IT 02353470285
Tel. +39.049.95.97.911
Fax +39.049.95.00.311
amministrazione@pec.fanton.com

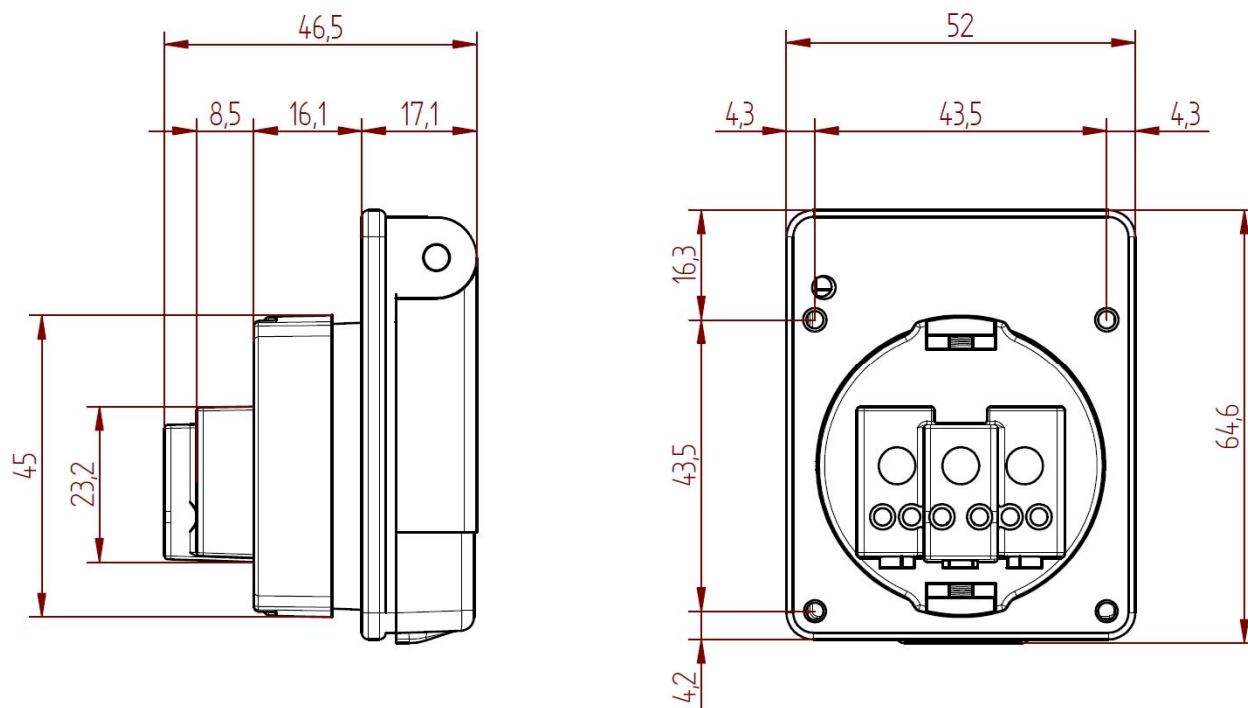

Fanton spa reserves the right to change and update the product at any time and without warning.
 Date: 18/01/2018 Revision: 0

FANTON S.p.A.

Società soggetta a direzione e coordinamento da parte di Fa.Mi. srl

Viale dell'Industria, 8/10
 35026 CONSELVE (PD) ITALY
 Web: <http://www.fanton.com>
info@fanton.com

P.I./VAT - IT 02353470285
 Tel. +39.049.95.97.911
 Fax +39.049.95.00.311
amministrazione@pec.fanton.com