

DATA SHEET

Total Pages No.:
4

Date:
10/06/15

Document No.:
001DE

Rev.
0.0


Object: Horizontal Multi Socket DE standard



Design:

FIDO

MADE IN
ITALY

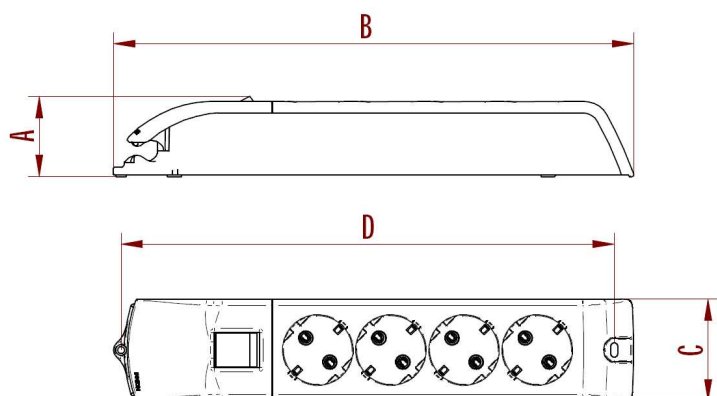

CODICE	A	B	C	D
410100DE	45	292	57	277
420100DE				
4101002DE				
4201002DE				
4101001DE				
4201001DE				
4201003DE				
420120DE	42	292	57	277
410110DE				
420110DE				
4101102DE				
4201101DE				
4201102DE				
4201103DE				
420130DE	45	374	57	359
4101502DE				
4201502DE				
4201503DE				
420170DE				

The innovative, exclusive, patented system that allows the cable to be positioned in an orderly manner, reducing clutter.

The terminal space is opened by unscrewing the screws on the rear allowing trouble-free replacement or installation of the power supply cable. Once wiring has been done, no screws are insight on the front of the multi-socket.

The multi-sockets are also available with two 1,2A USB sockets for charging smartphones, tablets, iPads, and any other electronic equipment.

No oxidisation, no wearing out. Long life.

Wall mounting or fixing using self-locking clamps

Available with or without cables, in various versions, from 4 to 6 sockets, as well as USB ports.



Description: 	• Colour: White • Version w/wo cable, w/wo switch, w/wo USB ports • Cable power supply length: 1,5 and 3 mt. or w/o • w or w/o Luminous switch • Thermoplastic case at high resistance
Multi-socket features:  Environmental features:	• Polycarbonate and Nylon section • Max power supply 3500 W (16 A) • 3G1 or 3G1,5 <HAR> H05VV-F power supply cable homologated Schuko sockets • Ripping cable holder • CE marking (no version w/o cable) • IP20 • USB version : 1,2 A max output • USB red led ready to charge • USB Blink red led over load charge • Storage and freight temperature: - 40 + 70° C • Installation temperature: - 20 + 70° C • Usage temperature: - 20 + 70° C

TECHNICAL features :

ITEMs		DIMENSIONAL FEATURES			ELECTRICAL FEATURES		PACKAGING	
code	Descriptions	Sockets number	Switch	USB	Insertion No. (16 A)	Max Power Supply (Watt)	(No. pcs)	Packaging (external)
WHIT CABLE								
420110DE	4 sockets German std. 1,5 m 3G1 plug 2+E 16A French/German std. without switch	4	N	N	5000	3500	12	Shrink film + box
4201101DE	4 sockets German std. 3 m 3G1 plug 2+E 16A French/German std. without switch	4	N	N	5000	3500	12	Shrink film + box
4201102DE	4 sockets German std. 1,5 m 3G1,5 plug 2+E 16A French/German std. without switch	4	N	N	5000	3500	12	Shrink film + box
4201103DE	4 sockets German std. 3 m 3G1,5 plug 2+E 16A French/German std. without switch	4	N	N	5000	3500	12	Shrink film + box
420100DE	4 sockets German std. 1,5 m 3G1 plug 2+E 16A French/German std. with switch	4	Y	N	5000	3500	12	Shrink film + box
4201001DE	4 sockets German std. 3 m 3G1 plug 2+E 16A French/German std. with switch	4	Y	N	5000	3500	12	Shrink film + box
4201002DE	4 sockets German std. 1,5 m 3G1,5 plug 2+E 16A French/German std. with switch	4	Y	N	5000	3500	12	Shrink film + box
4201003DE	4 sockets German std. 3 m 3G1,5 plug 2+E 16A French/German std. with switch	4	Y	N	5000	3500	12	Shrink film + box
420210DE	6 sockets German std. 1,5 m 3G1 plug 2+E 16A French/German std. without switch	6	N	N	5000	3500	12	Shrink film + box
4202101DE	6 sockets German std. 3 m 3G1 plug 2+E 16A French/German std. without switch	6	N	N	5000	3500	12	Shrink film + box
4202102DE	6 sockets German std. 1,5 m 3G1,5 plug 2+E 16A French/German std. without switch	6	N	N	5000	3500	12	Shrink film + box
4202103DE	6 sockets German std. 3 m 3G1,5 plug 2+E 16A French/German std. without switch	6	N	N	5000	3500	12	Shrink film + box
420200DE	6 sockets German std. 1,5 m 3G1 plug 2+E 16A French/German std. with switch	6	Y	N	5000	3500	12	Shrink film + box
4202001DE	6 sockets German std. 3 m 3G1 plug 2+E 16A French/German std. with switch	6	Y	N	5000	3500	12	Shrink film + box
4202002DE	6 sockets German std. 1,5 m 3G1,5 plug 2+E 16A French/German std. with switch	6	Y	N	5000	3500	12	Shrink film + box
4202003DE	6 sockets German std. 3 m 3G1,5 plug 2+E 16A French/German std. with switch	6	Y	N	5000	3500	12	Shrink film + box
4201502DE	4 sockets German std. 1,5 m 3G1 plug 2+E 16A French/German std. with switch + 2USB	4	Y	Y	5000	3500	12	Shrink film + box
4201503DE	4 sockets German std. 3 m 3G1 plug 2+E 16A French/German std. with switch + 2USB	4	Y	Y	5000	3500	12	Shrink film + box
WITHOUT CABLE								
420130DE	4 sockets German std. without switch	4	N	N	5000	3500	12	Shrink film + box
420120DE	4 sockets German std. with switch	4	Y	N	5000	3500	12	Shrink film + box
420230DE	6 sockets German std. without switch	6	N	N	5000	3500	12	Shrink film + box
420220DE	6 sockets German std. with switch	6	Y	N	5000	3500	12	Shrink film + box
420170DE	4 sockets German std. with switch + 2USB	4	Y	Y	5000	3500	12	Shrink film + box

<u>Usage:</u>	• Office utilities • Printers, computers and server power supplier • Domestic users
<u>Normative features:</u>	• DIN VDE 0620-2-1: 2013 • IEC 60884-2-7: 2013 • CEI 23-50 (Tests on domestic outlets and similars) • 89/336 CEE (EMC Standard) <i>only USB version</i> • BT2006/95/CE (BT Standard)