


SIZE 5

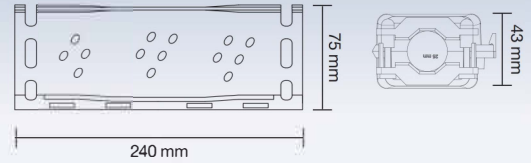

Max cable diameter: 32 mm

- CEI EN 50393
- EN 60695-2-11: Self-extinguishing.
- CEI-20-37/2-1 and CEI 20-37/7 Low emission of smoke and toxic gases.
- Protection grade: equivalent to IPX8 (CEI 60529) tested under one metre of water (CEI EN 50393 par. 8.6.3).
- Operating temperature: from -20 °C to +90 °C.

SHARK 525WS




Code: SH0525WS

Straight joint for 0.6/1 kV multi-core cables up to five core up to 25 mm². The armour bond kit supplied allows straight jointing also on armoured cables. The insulated five-core terminal block, supplied, guarantees double insulation and with the special cable strain relief system stop the cable onto the joint.



APPLICATION TABLE

CABLE TYPE	Cores	Min. cross section (mm ²)	Max. cross section (mm ²)
Stranded flexible and solid/stranded rigid conductor (mm ²)		6	25
		6	25
		6	25

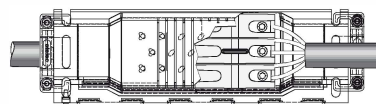

Kit contents

- Joint;
- Five-core insulated terminal block;
- Cable strain relief system;
- Allen Key;
- Ties;
- Instructions.