


Technical specifications

FDL-2C (Floor duct light 2 comp.)

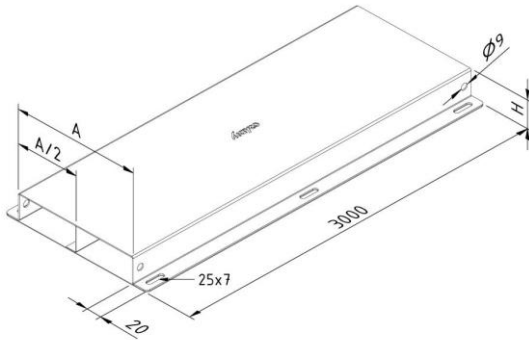

Category:

FDL-2C

Product features:


With 2 compartments (1/2 - 1/2)
Cover thickness: 1mm
Base plate thickness: 1mm
Heights: 28 - 38 - 48mm
Widths: 170 - 250 - 350mm

Additional product information:

EN50085 compliant
Slides into the floorbox FS-BOX
Suitable for pulling cables
Robust and strong
Fixation by means of FS-FD-FB

Execution: Pre-galvanized								
Product	Number	Height (mm)	Width (mm)	Length (mm)	Dim A (mm)	Fmax (kN)	Unit	Packaging (unit)
FS-FDL28-170-2C-3PG	15709	28	170	3000	170		M	3
FS-FDL28-250-2C-3PG	15710	28	250	3000	250		M	3
FS-FDL28-350-2C-3PG	15711	28	350	3000	350		M	3
FS-FDL38-170-2C-3PG	15712	38	170	3000	170		M	3
FS-FDL38-250-2C-3PG	15713	38	250	3000	250		M	3
FS-FDL38-350-2C-3PG	15714	38	350	3000	350		M	3
FS-FDL48-170-2C-3PG	15715	48	170	3000	170		M	3
FS-FDL48-250-2C-3PG	15716	48	250	3000	250		M	3
FS-FDL48-350-2C-3PG	15717	48	350	3000	350		M	3

Mounting instructions:

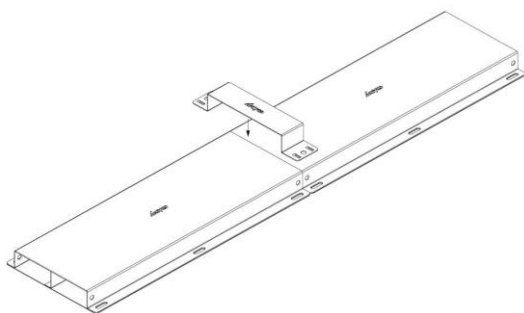

Peripheral information:

Coupling: FD-ACC-FB

Equipotential bonding: EN50085

EC conformity: EC directive 2006/95/EC (Low voltage) as modified by directive 93/68/EEC (CE marking)