


# Technical specifications

## HC-CE-SQ-260-PA (Hinged cover sq. carpet edge)

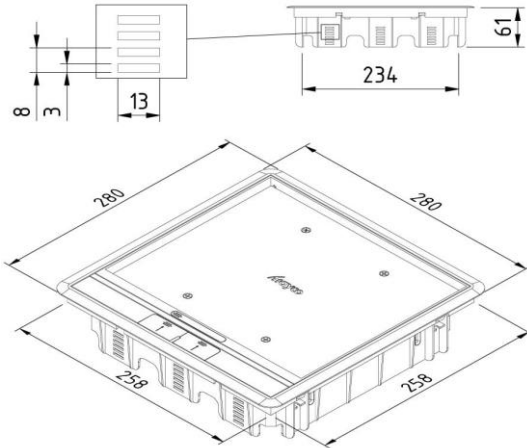

### Category:

HC-CE-SQ-260-PA

### Product features:

Bottom frame (with carpet edge) + cover + cable exit + fixation screws

Colour: RAL9011 (black) - RAL7011 (grey)

Max. load small surface: 1500N

Max. load large surface: 2000N

In use: IP20

Not in use: IP30

Standard cover recess depth: 8mm

Metal plate: 3mm

Material: PA6 V0 (flame retardant)

Application: dry-cleaning areas

### Additional product information:

EN50085 compliant

Hinged cover with integrated opening lever

The cover will close again automatically unless it is set to its secure position

Can be fitted with:

- 1x apparatus cup low height (FS-AC-LOW-260-PG)

or

- max. 3x horizontal apparatus cup (FS-AC-HO-260-PA9011)

Depth-recess adjustable with filling element (FS-HC-SQ-260-FILL)



Can be fitted directly to the green adjustment frame on the floorbox, ensuring perfect alignment with the finishing floor

For fitting into floating floor, see HC-CE-SQ-260-RF-PA

Execution: Polyamide, grey								
Product	Number	Height (mm)	Width (mm)	Length (mm)	Dim A (mm)	Fmax (kN)	Unit	Packaging (unit)
FS-HC8-CE-SQ-260-PA7011	15641	8	258	258	260		ST	1

Execution: Polyamide, black								
Product	Number	Height (mm)	Width (mm)	Length (mm)	Dim A (mm)	Fmax (kN)	Unit	Packaging (unit)
FS-HC8-CE-SQ-260-PA9011	15640	8	258	258	260		ST	1

### Mounting instructions:

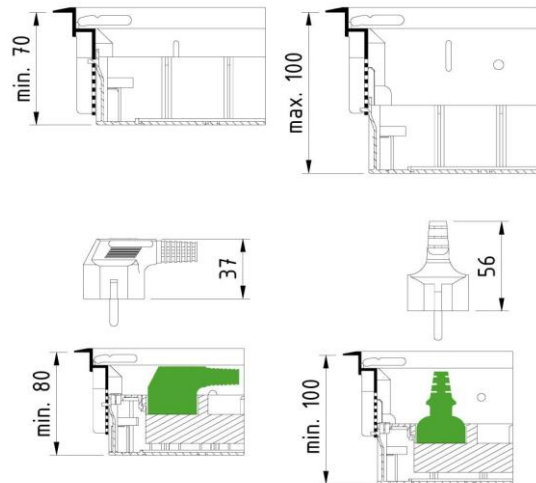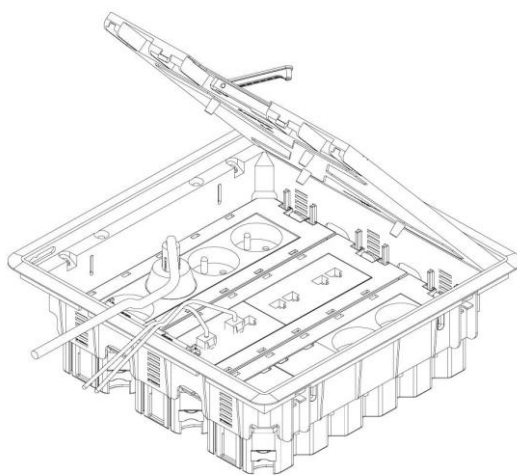

### Peripheral information:

EC conformity: EC directive 2006/95/EC (Low voltage) as modified by directive 93/68/EEC (CE marking)

### Ingress protection (EN60529):

**VASTE VOORWERPEN**  
Het eerste cijfer geeft de bescherming aan tegen indringen van vaste voorwerpen

IP0x: geen bescherming  
IP1x: voorwerpen met  $\varnothing > 50$  mm (vb. handen)  
IP2x: voorwerpen met  $\varnothing > 12$  mm (vb. vingers)  
IP3x: voorwerpen met  $\varnothing > 2,5$  mm (vb. draden, kabels en gereedschap)  
IP4x: voorwerpen met  $\varnothing > 1$  mm (vb. draden, kabels en gereedschap)  
IP5x: bescherming tegen contact met spanningvoerende delen en tegelijk schadelijke ophoping van stof (er kan stof binnen dringen, maar dit beïnvloedt de werking niet)  
IP6x: contact met spanningvoerende delen (vb. bedrading) en tegen binnendringen van stof

**WATER**  
Het tweede cijfer geeft aan in welke mate het toestel beschermd is tegen water

IPx0: geen bescherming  
IPx1: 0° waterdruppels (verticaal)  
IPx2: 15° waterdruppels (15° vanaf de verticale as)  
IPx3: 60° waterdruppels (60° vanaf de verticale as)  
IPx4: willekeurige richting (spatwater)  
IPx5: willekeurige richting (waterstralen lage druk)  
IPx6: willekeurige richting (waterstralen hoge druk)  
IPx7: gehele onderdompeling (tot een diepte van 1m gedurende 30 minuten)