


Technical specifications

ACC-AC-LOW (Apparatus cup low height)

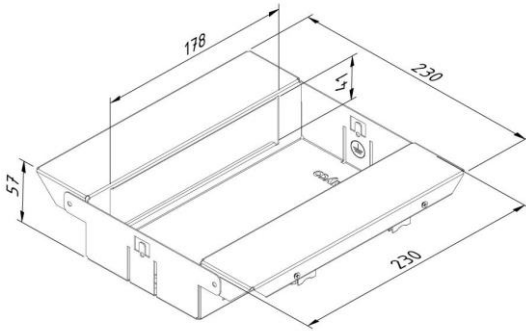

Category:

ACC-AC-LOW

Product features:


Apparatus cup + strain relief (4x) + fixation screws (4x)
Material: sendzimir
Applications with low installation depths

Additional product information:

EN50085 compliant
For installation depths of at least 65 mm
Can be used with click-outlets of type Module 45
Used with straight plug: all Module 45 appliance types applicable in all positions
Used with angled plug: types with vertical provision for the plug
Fitted with the required connections for equipotential bonding
Fitted with 4 strain relievers

| Execution: | Pre-galvanized | | | | | | | |
|------------------|----------------|----------------|---------------|----------------|---------------|--------------|------|---------------------|
| Product | Number | Height (mm) | Width (mm) | Length (mm) | Dim A (mm) | Fmax (kN) | Unit | Packaging (unit) |
| FS-AC-LOW-260-PG | 15648 | 57 | 230 | 230 | | | ST | 1 |

Mounting instructions:

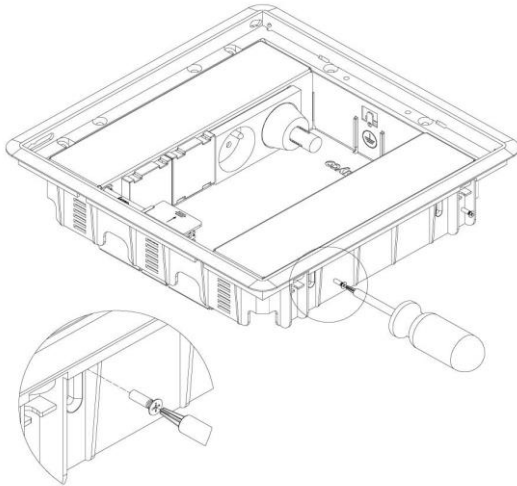

Peripheral information:

Equipotential bonding: EN50085

EC conformity: EC directive 2006/95/EC (Low voltage) as modified by directive 93/68/EEC (CE marking)