


Technical specifications

FDL-3C (Floor duct light 3 comp.)

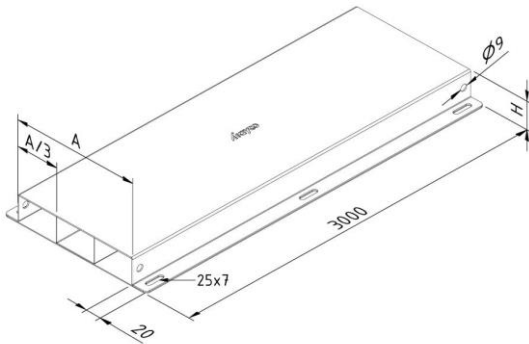

Category:

FDL-3C

Product features:


With 3 compartments (1/3 - 1/3 - 1/3)
Cover thickness: 1mm
Base plate thickness: 1mm
Heights: 28 - 38 - 48mm
Widths: 170 - 250 - 350mm

Additional product information:

EN50085 compliant
Slides into the floorbox FS-BOX
Suitable for pulling cables
Robust and strong
Fixation by means of FS-FD-FB

Execution: Pre-galvanized								
Product	Number	Height (mm)	Width (mm)	Length (mm)	Dim A (mm)	Fmax (kN)	Unit	Packaging (unit)
FS-FDL28-170-3C-3PG	15718	28	170	3000	170		M	3
FS-FDL28-250-3C-3PG	15719	28	250	3000	250		M	3
FS-FDL28-350-3C-3PG	15720	28	350	3000	350		M	3
FS-FDL38-170-3C-3PG	15721	38	170	3000	170		M	3
FS-FDL38-250-3C-3PG	15722	38	250	3000	250		M	3
FS-FDL38-350-3C-3PG	15723	38	350	3000	350		M	3
FS-FDL48-170-3C-3PG	15724	48	170	3000	170		M	3
FS-FDL48-250-3C-3PG	15725	48	250	3000	250		M	3
FS-FDL48-350-3C-3PG	15726	48	350	3000	350		M	3

Mounting instructions:

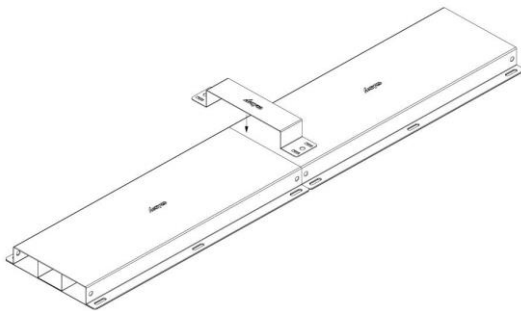

Peripheral information:

Coupling: FD-ACC-FB

Equipotential bonding: EN50085

EC conformity: EC directive 2006/95/EC (Low voltage) as modified by directive 93/68/EEC (CE marking)