


Technical specifications

FD-ACC-FB (Floor duct fixation bracket)

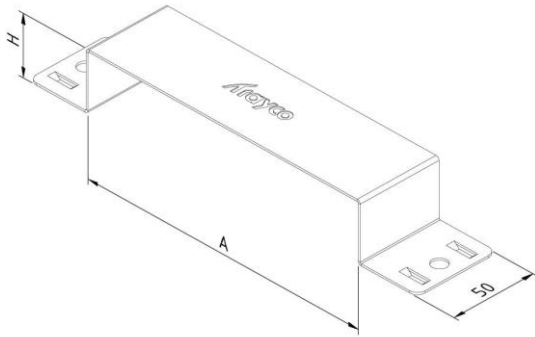

Category:

FD-ACC-FB

Product features:

Heights: 28 - 38 - 48mm

Widths: 170 - 250 - 350mm

Additional product information:

EN50085 compliant


For fixing and connecting floorducts

Used for equipotential bonding

Also works as a seal for any possible openings when connecting so that cut lengths can be easily recycled

Execution: Pre-galvanized								
Product	Number	Height (mm)	Width (mm)	Length (mm)	Dim A (mm)	Fmax (kN)	Unit	Packaging (unit)
FS-FD-FB28-170-PG	15613	28	170		170		ST	1
FS-FD-FB28-250-PG	15614	28	250		250		ST	1
FS-FD-FB28-350-PG	15621	28	350		350		ST	1
FS-FD-FB38-170-PG	15622	38	170		170		ST	1
FS-FD-FB38-250-PG	15623	38	250		250		ST	1
FS-FD-FB38-350-PG	15624	38	350		350		ST	1
FS-FD-FB48-170-PG	15625	48	170		170		ST	1
FS-FD-FB48-250-PG	15626	48	250		250		ST	1
FS-FD-FB48-350-PG	15627	48	350		350		ST	1

Mounting instructions:

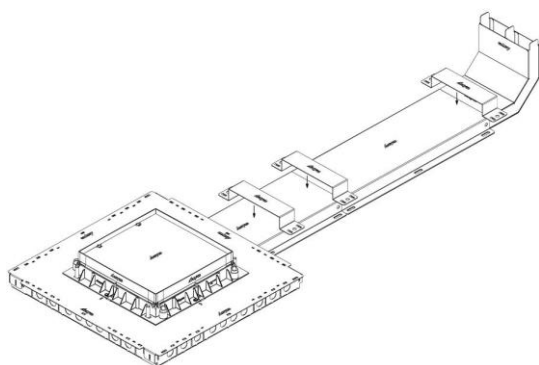

Peripheral information:

Equipotential bonding: EN50085

EC conformity: EC directive 2006/95/EC (Low voltage) as modified by directive 93/68/EEC (CE marking)