


Technical specifications

CT-RP (Cable Tray Reduction Plate)

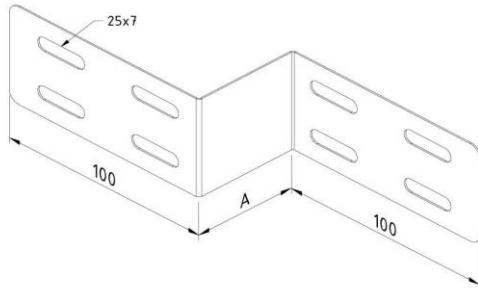

Finishing: Pre-galvanized								
Product	Number	Height (mm)	Width (mm)	Length (mm)	Dim A (mm)	Fmax (kN)	Unit	Packaging (unit)
CT35-RP-050-PG	12146	35	50	0	50		ST	1
CT35-RP-100-PG	12147	35	100	0	100		ST	1
CT35-RP-200-PG	12148	35	200	0	200		ST	1
CT60-RP-050-PG	10168	60	50	0	50		ST	1
CT60-RP-100-PG	10169	60	100	0	100		ST	1
CT60-RP-200-PG	10170	60	200	0	200		ST	1
CT85-RP-050-PG	11711	85	50	0	50		ST	1
CT85-RP-100-PG	11712	85	100	0	100		ST	1
CT85-RP-200-PG	11713	85	200	0	200		ST	1
CT110-RP-050-PG	12002	110	50	0	50		ST	1
CT110-RP-100-PG	12003	110	100	0	100		ST	1
CT110-RP-200-PG	12004	110	200	0	200		ST	1

Finishing: Dipped galvanized								
Product	Number	Height (mm)	Width (mm)	Length (mm)	Dim A (mm)	Fmax (kN)	Unit	Packaging (unit)
CT35-RP-050-DG	12196	35	50	0	50		ST	1
CT35-RP-100-DG	12197	35	100	0	100		ST	1
CT35-RP-200-DG	12198	35	200	0	200		ST	1
CT60-RP-050-DG	10484	60	50	0	50		ST	1
CT60-RP-100-DG	10485	60	100	0	100		ST	1
CT60-RP-200-DG	10486	60	200	0	200		ST	1
CT85-RP-050-DG	11807	85	50	0	50		ST	1
CT85-RP-100-DG	11808	85	100	0	100		ST	1
CT85-RP-200-DG	11809	85	200	0	200		ST	1
CT110-RP-050-DG	12061	110	50	0	50		ST	1
CT110-RP-100-DG	12062	110	100	0	100		ST	1
CT110-RP-200-DG	12063	110	200	0	200		ST	1

Finishing: Coated								
Product	Number	Height (mm)	Width (mm)	Length (mm)	Dim A (mm)	Fmax (kN)	Unit	Packaging (unit)
CT35-RP-050-CO	12246	35	50	0	50		ST	1
CT35-RP-100-CO	12247	35	100	0	100		ST	1

CT35-RP-200-CO	12248	35	200	0	200	ST	1
CT60-RP-050-CO	10812	60	50	0	50	ST	1
CT60-RP-100-CO	10813	60	100	0	100	ST	1
CT60-RP-200-CO	10814	60	200	0	200	ST	1
CT85-RP-050-CO	11863	85	50	0	50	ST	1
CT85-RP-100-CO	11864	85	100	0	100	ST	1
CT85-RP-200-CO	11865	85	200	0	200	ST	1
CT110-RP-050-CO	11909	110	50	0	50	ST	1
CT110-RP-100-CO	11910	110	100	0	100	ST	1
CT110-RP-200-CO	11911	110	200	0	200	ST	1

Mounting instructions:

-

Load capacity:

Standard: -

Max. load: -

Load diagram: -

Information:

Coupler: BN06-10-EG

Equipotential bonding: IEC61537

EC declaration: EC directive 2006/95/EC (Low voltage) as modified by directive 93/68/EEC (CE marking)

PG

Sendzimir galvanized (EN 10143) PG (pre-galvanized)

Products made of Sendzimir (pre-galvanized) or continuous hot-dip galvanized steel sheet and coils are mostly used wherever limited chemical contamination is likely, for example, in offices, industrial buildings, covered parking lots, etc.

Characteristic of this steel type is that – prior to mechanical deformation – it is given a zinc coating by means of a continuous dipping process. This zinc coating is easily deformed. A cathodic action occurs on cut surfaces (up to 1.5mm) that protects against oxidation.

First, the steel is chemical cleaned and roughened in order to achieve a good bond. After the dipping process, the surplus zinc is blown off and one obtains an extra passivating coat (an ultra-thin protective coat) to prevent oxidation of the zinc coating (white rust). The coating thickness is usually expressed in g/m². The most deployed type of Sendzimir steel is Z 275 = 275g/m² (weighed on both sides), this corresponds to 18-20 µm (micron). Sendzimir galvanized steel sourced from modern galvanizing lines has, in general, a uniform, shiny appearance. The previous, common fl owery surface is scarcely seen these days. This effect is obtained under the influence of lead but has no effect on the quality of the coating. The use of lead was banned due to the ever more stringent environmental standards.

DG

Hot-dip galvanized (EN ISO 1461) DG (dipped-galvanised)

Whenever cable support systems are exposed to the elements and/or caustic substances (such as petrochemical applications), they are given an additional treatment in the form of hot-dip galvanizing.

Hot-dip galvanizing is a materials science process designed to render the steel non-corroding. If this coating is breached, the zinc will act as a sacrificial anode, so that the iron is protected by the zinc (aka cathodic protection). During galvanization, three alloys are formed: an iron-zinc alloy, a zinc-iron alloy and also a zinc alloy. The pre-treatment of the steel is crucially important in order to achieve a good bond.

The following process steps are involved: degreasing, rinsing, pickling, re-rinsing, fl uxing, drying and hot-dipping. The coating thickness depends on the steel composition, the material thickness and the time spent in the zinc bath. In the galvanizing standard NEN-EN-ISO 1461, the minimum coating thickness are prescribed (as shown in following overview), just as the zinc shrinkage per year which will depend on environmental factors (see table entitled 'Corrosion classes'). In addition, the zinc coating forms an excellent substrate for other post-treatments, such as applying a powder coating and coats of paint (better known as the duplex system).

An added advantage of hot-dip galvanizing is that along the edges and pointy bits, where objects are usually extra susceptible to corrosion, the zinc coating is thicker because of the behaviour of the liquid.

Minimum thicknesses of the zinc coating according to ISO 1461

- Using the hot-dip method

Material thickness ≥ 6 mm = min. zinc coating thickness (average) 85 μ m

Material thickness ≥ 3 mm to < 6 mm = min. zinc coating thickness (average) 70 μ m

Material thickness $\geq 1,5$ mm to < 3 mm = min. zinc coating thickness (average) 55 μ m

Material thickness $< 1,5$ mm = min. zinc coating thickness (average) 45 μ m

- Using the drum method

Material thickness ≥ 3 mm = min. zinc coating thickness (average) 55 μ m

Material thickness < 3 mm = min. zinc coating thickness (average) 45 μ m

CO

Polyester powder coating CO (coated)

Polyester coats will be used in moderate environments where the aesthetic aspect and sustainability must go hand in hand. The distinctive property of a polyester coating is its resistance to discoloration due to sunlight.

If used in a harsher environment, it is strongly recommended to apply an epoxy coating; this is less porous and therefore more resistant to chemicals. The disadvantage of an epoxy coating, however, is the rapid discoloration. If you want the best of both worlds, use an epoxy primer with a polyester top coat.

Just as with all the treatment techniques mentioned above, a thorough pre-treatment is crucial here too.

Depending on the base material, one will, in this case, degrease, rinse, pickle, rinse again, apply a conversion coat (e.g. chrome), rinse again, rinse with demi-water and/or dry.

Field of application according to resistance against corrosion:

Corrosion class	Atmospheric corrosion	Indoor environment	Outdoor environment	Surface treatments
C1	$< 0,1\mu\text{m}$	Heated buildings with neutral atmospheres: offices, shops, schools, hotels.		Electro-galvanised (EG) EN ISO 2081
C2	$0,1 - 0,7\mu\text{m}$	Unheated buildings where condensation may occur: sports halls, warehouses, shops.	Rural areas. Atmosphere with low impurities.	Pre-galvanised (PG) EN 10327 – EN 10143
C3	$0,7 - 2\mu\text{m}$	Production facilities with high moisture levels and some air impurities due to industrial processes: production plants.	City and industrial atmosphere, some impurities, coastal areas with low salt loads.	Dipped-galvanised (DG) EN ISO 1461
C4	$2 - 4\mu\text{m}$	Production facilities with high moisture levels and high air impurities due to industrial processes: swimming pools, Chemical industry.	Industrial areas and coastal areas with low salt load.	Dipped-galvanised (DG) EN ISO 1461 Polyester coating (CO) EN ISO 12944
C5-I	$4 - 8\mu\text{m}$	Polyester coating (CO)	Industrial areas with high moisture level and aggressive atmosphere.	Duplex (DU) (Dipped galvanised + Polyester coating)
C5-M	$4 - 8\mu\text{m}$	EN ISO 12944	Coastal or offshore areas with salt load.	Duplex (DU) (Dipped galvanised + Polyester coating)